

**GB** Arrow Rod is the right professional Tool for Electricians in installations in floating floors, in false ceiling, in empty walls and where are not available cable ducts. **Arrow Rod** is in fiber glass Ø 6 mm and give the best flexibility and at the same time the best resistance. **Arrow Rod Set** will be essential in electrical installation. To facilitate using of the components, it comes in a flexible strong tube.

**D** Schubstange aus verstärktem Glasfaserverbundstoff. Es ist die Lösung für die Kabelverlegung Zwischendecken, Hohlböden und Kabelkanäle.

**F** Tige de poussée en fibre de verre, c'est la solution pour l'installation de câbles dans les faux plafonds, planchers flottants et canalisés externe.

**E** Varilla de empuje en fibra de vidrio, Es la solución para la instalación de cables en falsos techos, tarimas flotantes y canales exteriores.

**I** Asta di spinta in fibra di vetro, la soluzione ideale per pavimenti galleggianti, pareti mobili e controsoffitti.



Item **4719.10.E** Set composed by:

10 Pcs. Rod Ø 6 - 1m.

1 pc. Round flexible starting head

1 Pc. Pulling eyelet

1Pc. Pulling eyelet with ring

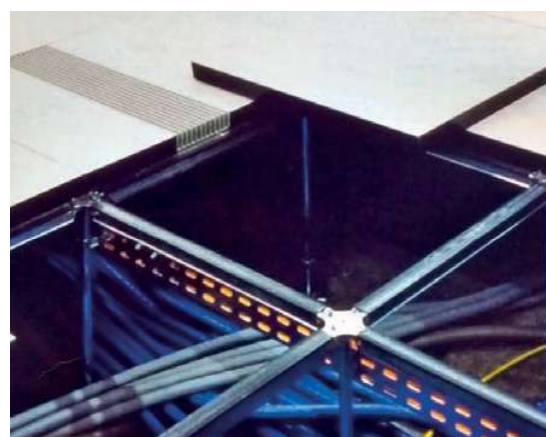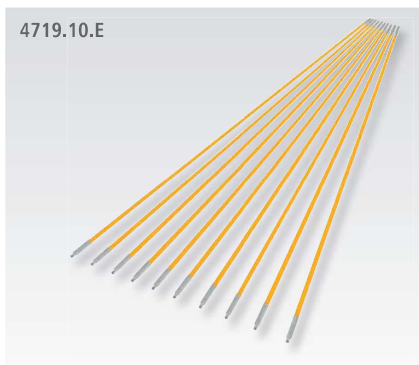

**GB** Special accessories and spare parts

**D** Sonder-Zubehör und Ersatzteile

**F** Accessoires spéciaux et pièces de rechange

**E** Accesorios especiales y piezas de repuestos

**I** Accessori speciali e pezzi di ricambio

## 101050

**GB** Flexible starting spinner M5.

**D** Flexible Federführungskopf mit Zugöse M5.

**F** Tête flexible avec œillet M5.

**E** Punta flexible con ojal de tiro M5.

**I** Puntale flessibile con asola M5.



## 101024

**GB** Pulling eyelet M5.

**D** Kopf mit Zugöse M5.

**F** Embout avec œillet M5.

**E** Punta ojal M5.

**I** Tirante con asola M5.



## 4719.PE

**GB** Pulling eyelet with ring.

**D** Führungskopf mit Öse und Ring.

**F** Ogive initiale avec bague.

**E** Cabeza guia con grillete de enganche.

**I** Ogiva iniziale con anello.



## CLZ

**GB** Cable pulling grip.

**D** Kabelziehstrumpf.

**F** Chauette tracteurs.

**E** Malla tiracables.

**I** Calze tirafili.

Item	Ø	L	Brake Load
CLZ4-6	4-6 mm	200 mm	215 kg
CLZ6-9	6-9 mm	210 mm	215 kg
CLZ9-12	9-12 mm	350 mm	450 kg
CLZ12-15	12-15 mm	350 mm	450 kg
CLZ15-19	15-19 mm	350 mm	1300 kg
CLZ19-25	19-25 mm	400 mm	1300 kg
CLZ25-31	25-31 mm	400 mm	1700 kg

